



SWING AND REVOLVING GATES

BR1-0 / BR1-U BR1-USC

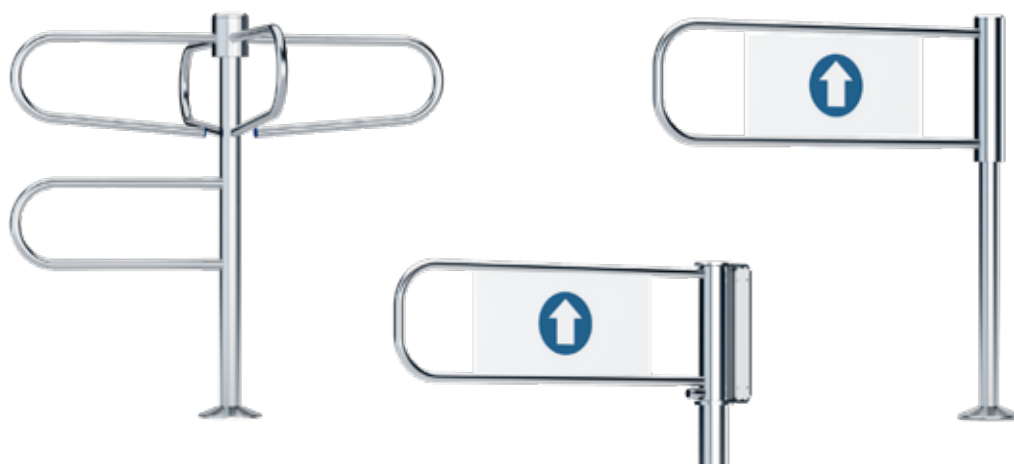

Effective solutions

in a modern style

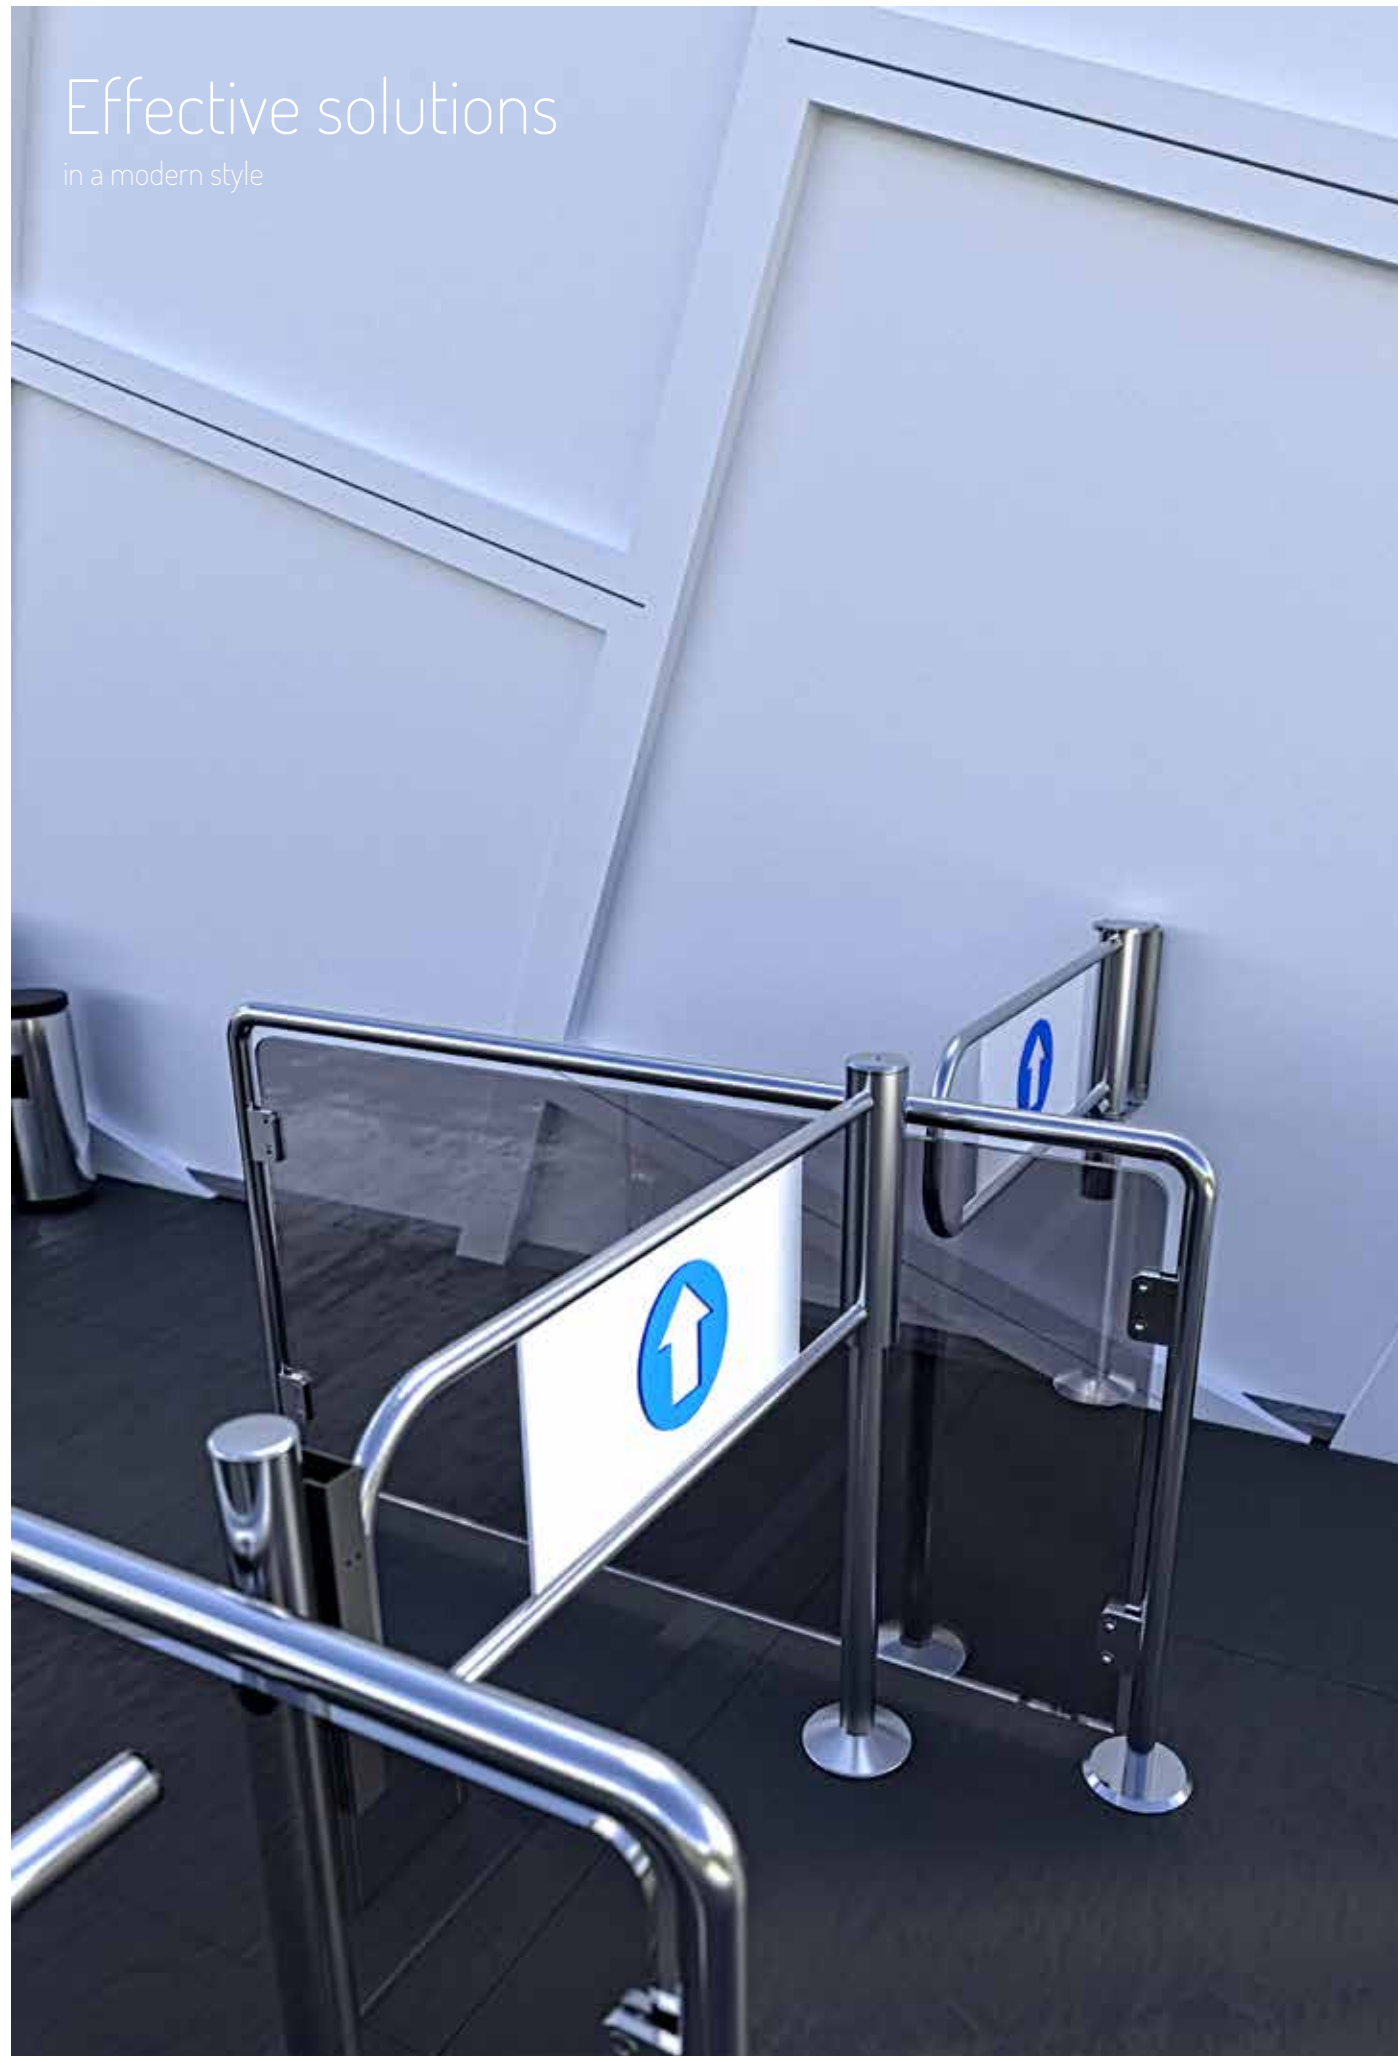

Montage

Easier than ever.



DEVICE DESCRIPTION

Mechanical swing and revolving gates are designed to support the control of passenger traffic in guarded passageways, inside where strict control of passenger traffic is not required.

The devices are designed for continuous operation and can be used successfully used in high intensity zones of personal traffic.


Examples of use:

- points of ticket control and access control for passenger traffic,
- airports/seaports,
- passages for authorised personnel, directing passenger traffic,
- points of access control in secured buildings (e.g. state offices such as border crossing points, other services),
- points of ticket control and fees at museums, theatres, cinemas, exhibitions, fair areas, show facilities, paid toilets, points of ticket control at sports facilities, e.g. swimming pools, stadiums, other sports and show facilities,
- access and time attendance control points in working places, e.g. offices, dedicated areas in factories.,




Safe solution that directs the movement of people


DEVICE'S DESCRIPTION BR1-U

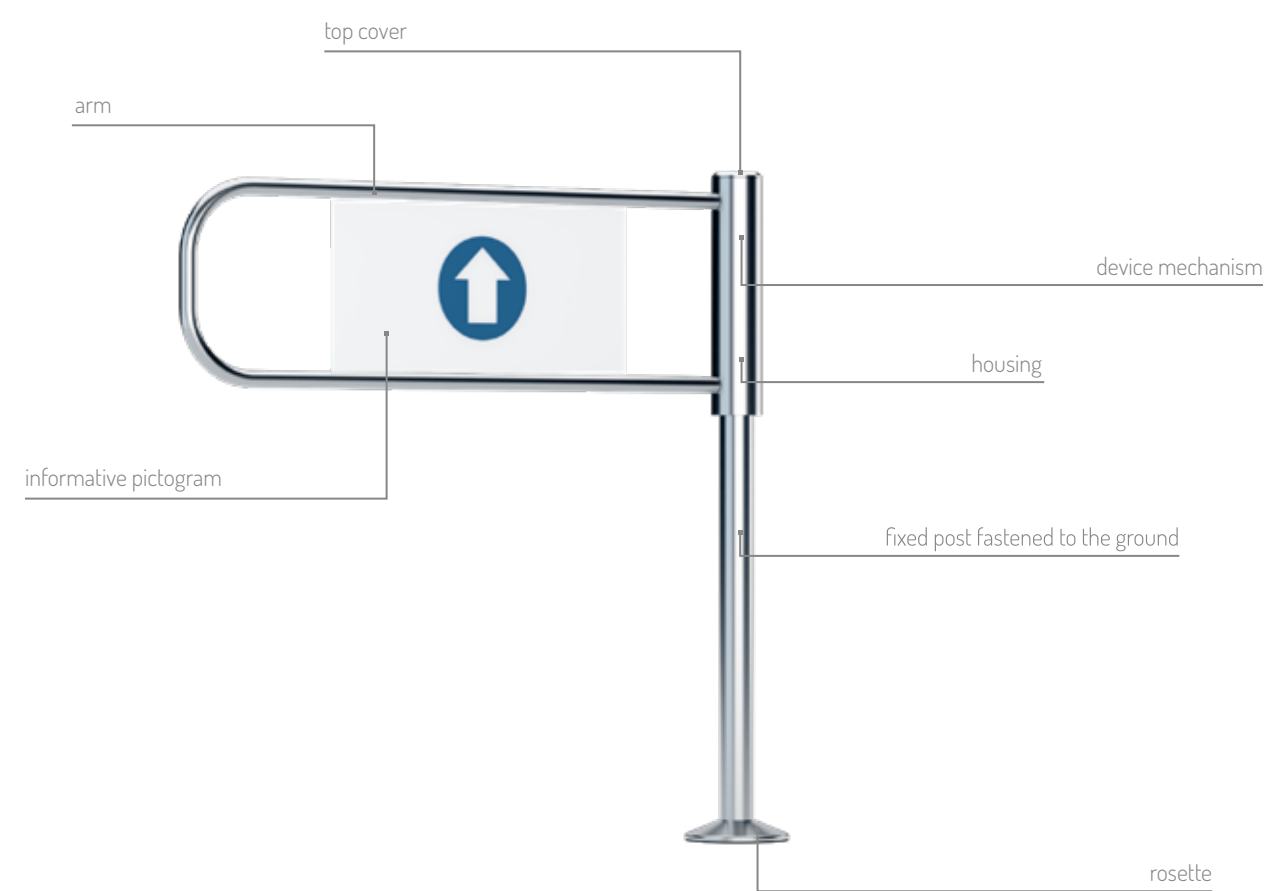


DEVICE'S DESCRIPTION BR1-O

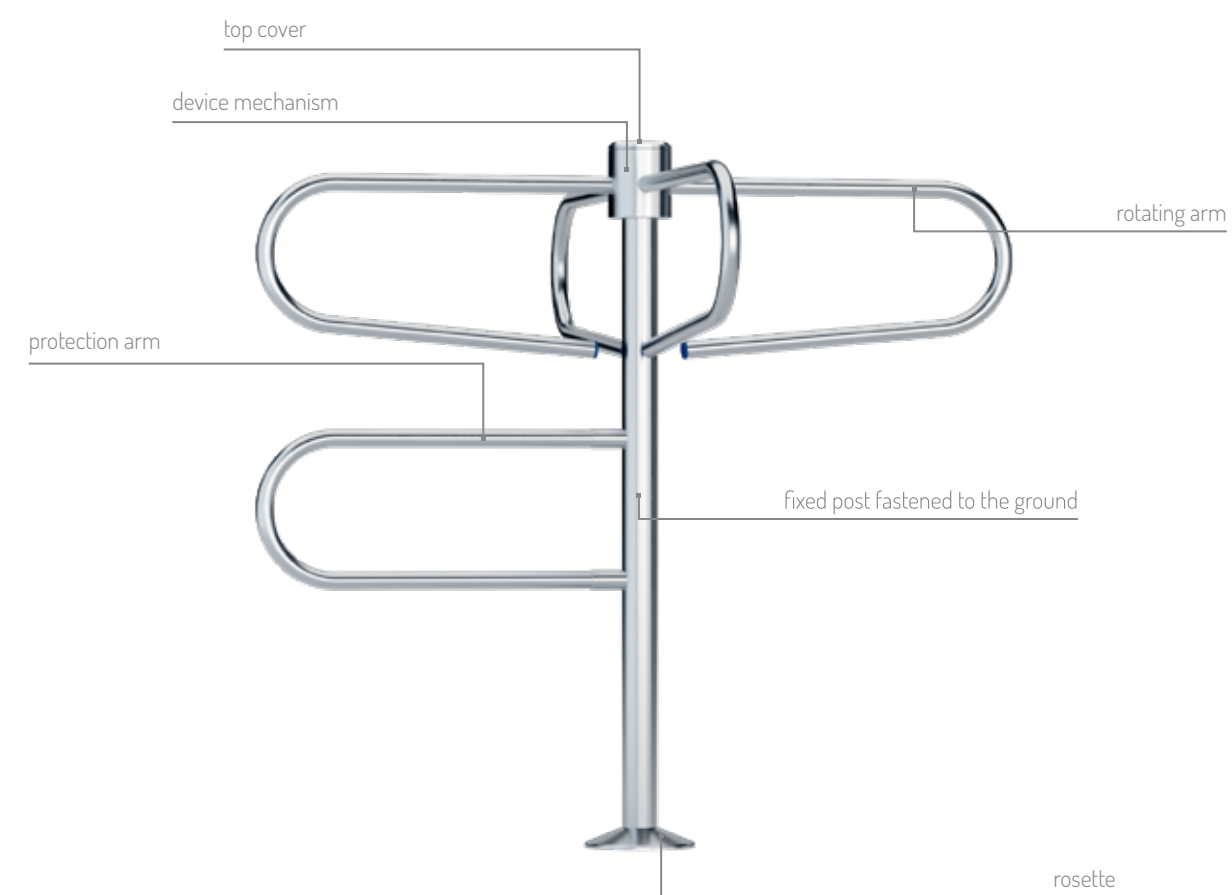


DEVICE'S DESCRIPTION BR1-USC

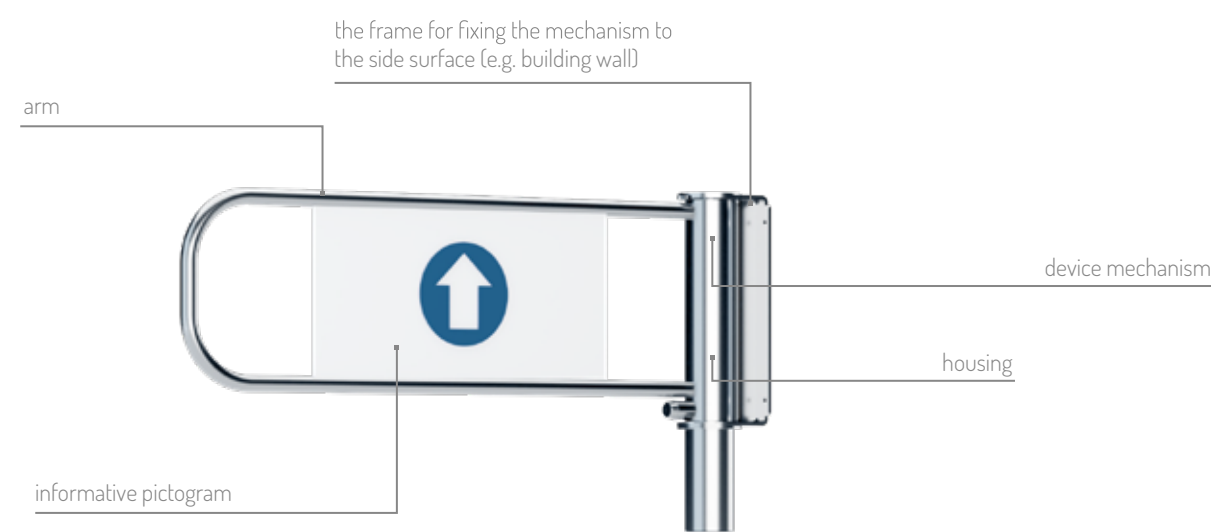

FINISH OPTIONS

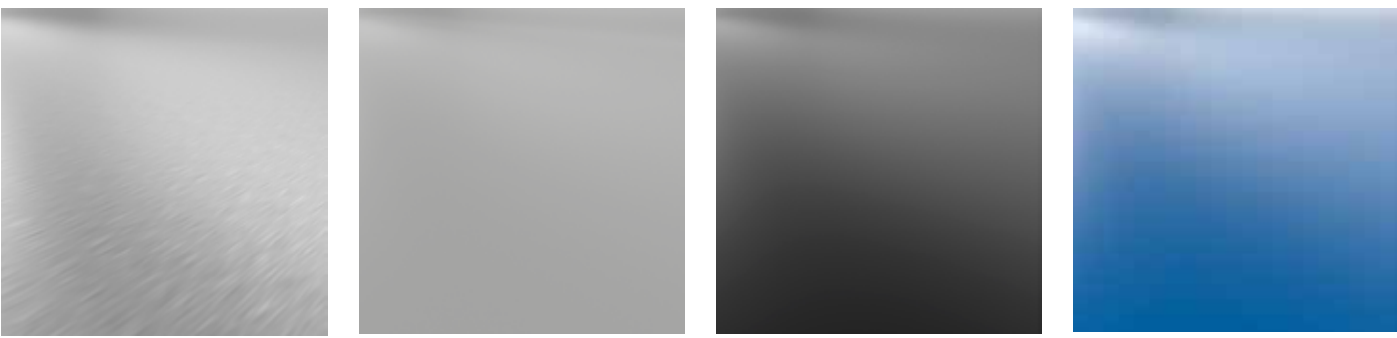


☒ Stainless steel- INOX AISI 304 ☐ RAL 9006 ☐ RAL 7016 ☐ RAL 5010

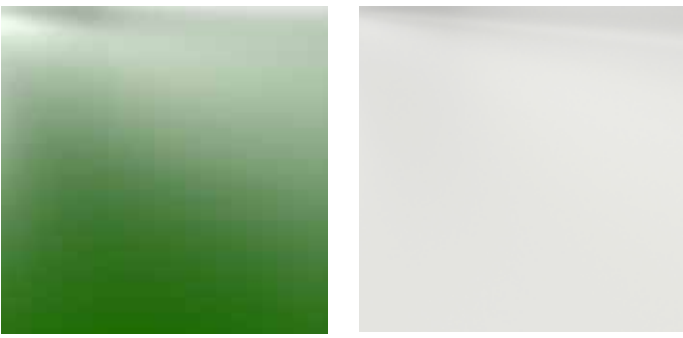

☐ RAL 6002 ☐ RAL 9003


☒ Standard finish
☐ Non-standard colour/non-standard finishing

PICTOGRAM TYPES

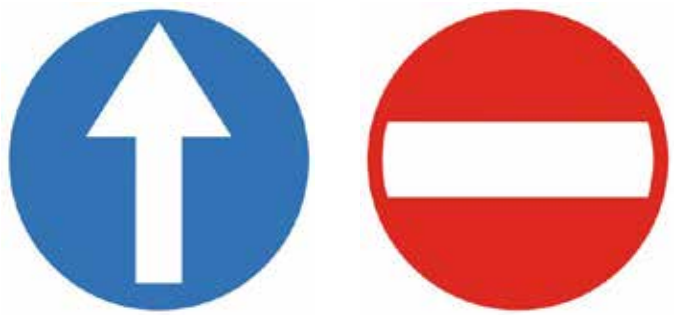

included with gate included with gate

FUNCTIONS

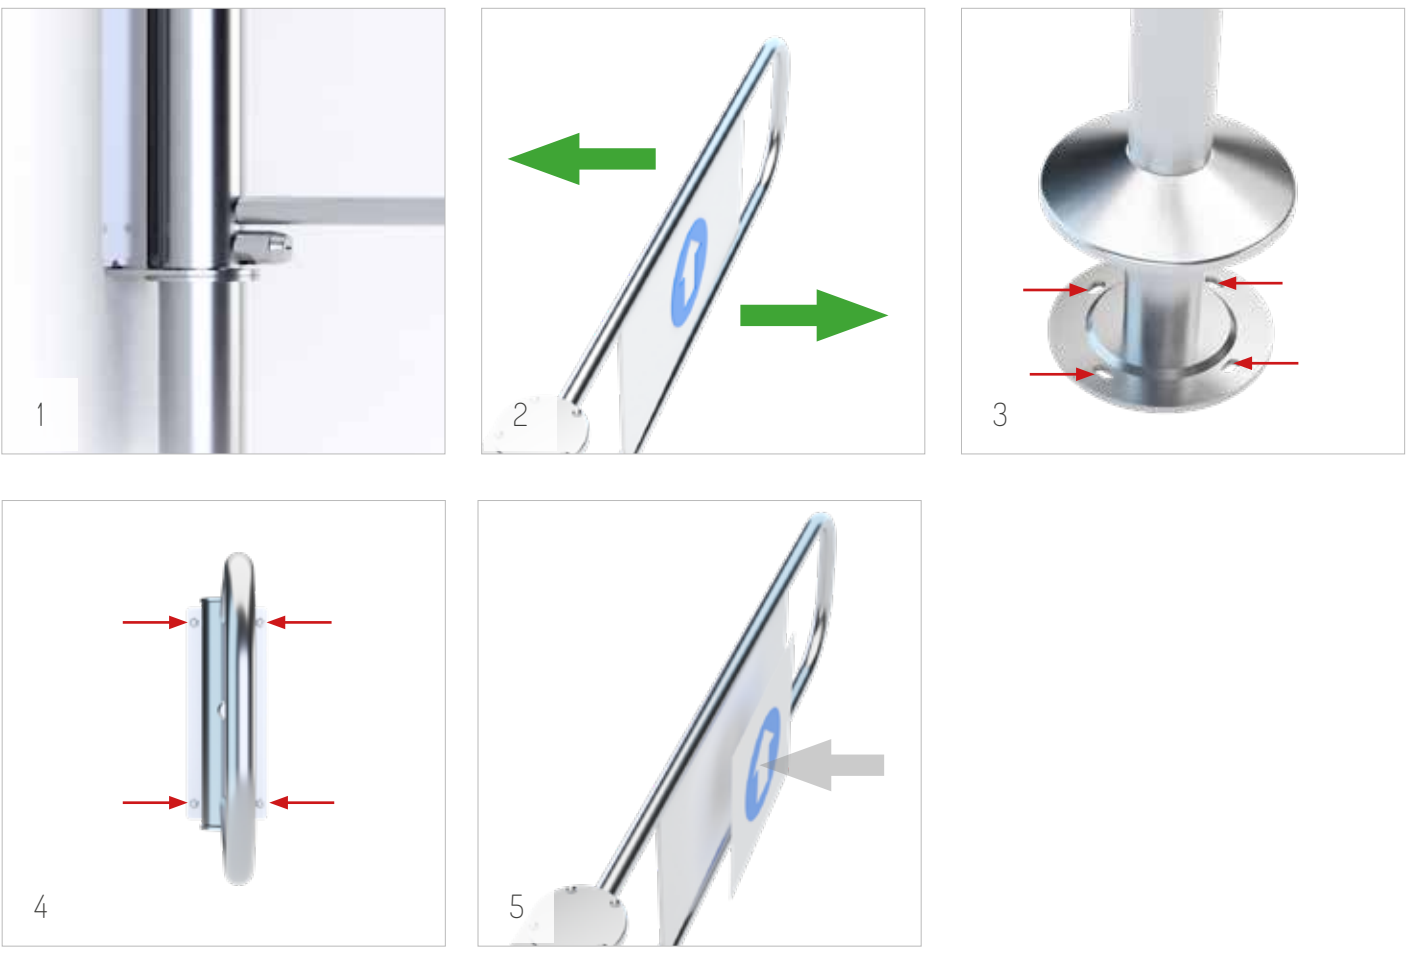

- 1. KEY LOCKING SYSTEM**

Key locking system allows to lock the arm with a key in case of power failure.
- 2. LEFT, RIGHT AND BI-DIRECTIONAL**


There are three versions of swing gates: left swing, right swing and bi-directional.
- 3. FLOOR MOUNTING**

The gate post is designed for floor mounting with four bolts (8mm). Swing gates are not equipped with bolts.
- 4. WALL MOUNTING**


The gate post is designed for wall mounting with two bolts (8mm). Swing gates are not equipped with bolts.
- 5. PICTOGRAMS**

Swing gates are equipped with pictograms which can be placed at the arm on site.

BR1-U TYPES

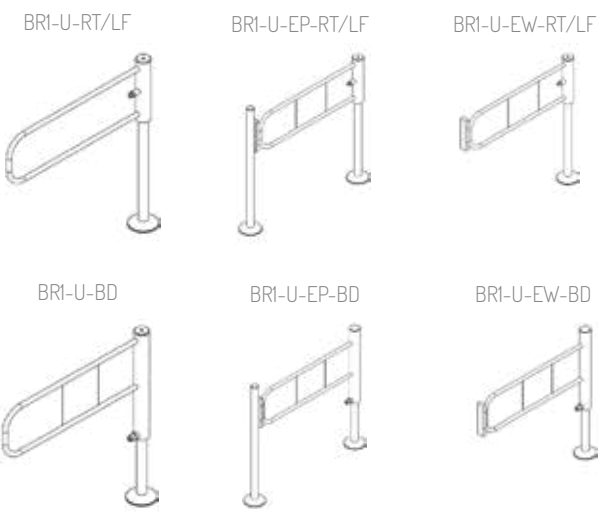


BR1-USC TYPES

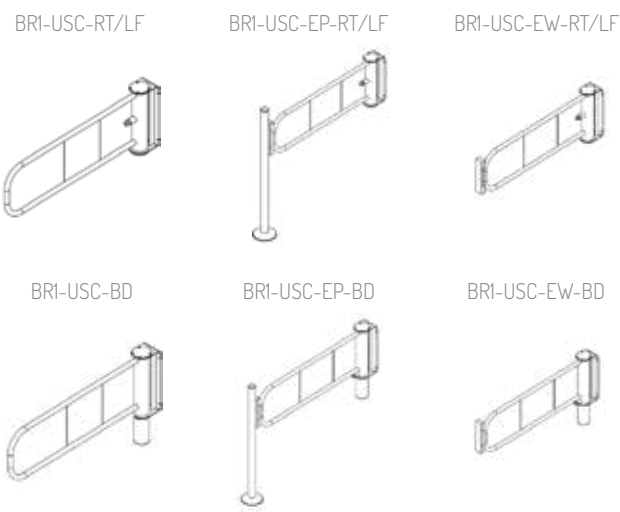

BR1-O TYPES



ELECTRIC LOCK MONTAGE

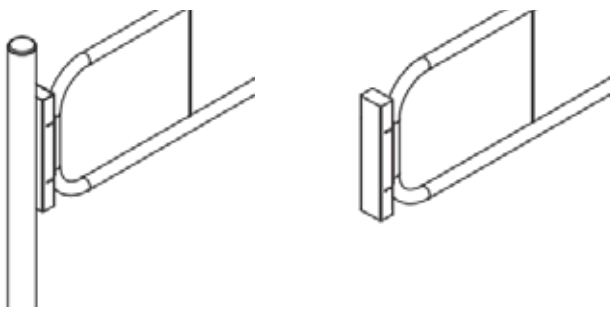

EP
floor post electric lock

EW
wall mount electric lock

DEFINITIONS OF DEVICES

Marking description	Series (BR1)	Model (O/U/USC)	Electric lock montage (EP/EW)	Direction of passage (LF/RT/BD)
Example	BR1	U	EP	LF

Examples of markings:

- BR1-U-EP-LF - BR1 series, U model, electric lock EP, direction of passage LF

EP - floor post electric lock,
EW - wall mount electric lock
LF - left swing

RT - right swing
BD - bi-directional

NOTE: Standard finish includes AISI 304 (INOX) stainless steel.

TECHNICAL SPECIFICATIONS

	BR1-O	BR1-U	BR1-USC
Operating temperature:	-25° do +50° C [-13° to 122°F]	-25° do +50° C [-13° to 122°F]	-25° do +50° C [-13° to 122°F]
Storage temperature:	-30° do +60° C [-22° to 140°F]	-30° do +60° C [-22° to 140°F]	-30° do +60° C [-22° to 140°F]
Max operating humidity:	10-80 %	10-80 %	10-80 %
Operation environment:	inside buildings	inside buildings	inside buildings
Net weight - [kg/lbs]:	-20 / -44	-15 / -33	-8 / -17

LEFT, RIGHT AND BI-DIRECTIONAL SWING



Left opening swing - counter clockwise



Right opening swing - clockwise



Bi-directional swing

OPTIONAL EQUIPMENT*

Name	Description
SW-1-ARM	Post

* Optional equipment is not included with the device




Materials and instructional videos available at www.gastopgroup.com

All information given herein are valid for the moment of publishing. GASTOP reserves the right to introduce changes to the offer herein, concerning both the models as well as their construction and equipment. This document does not constitute an offer as understood by the law and is published for information only. Equipment versions presented in this catalogue may not be available. Visualisations and photos of products presented herein may not show technical solutions adopted, properties of materials or colours used in detail. In order to define the abovementioned parameters, it is advised to turn to an authorised distributor or the device producer directly for more information.


All rights reserved Gastop Production Sp. z o.o.

DIMENSIONS BR1-USC

BR1-USC-RT/LF

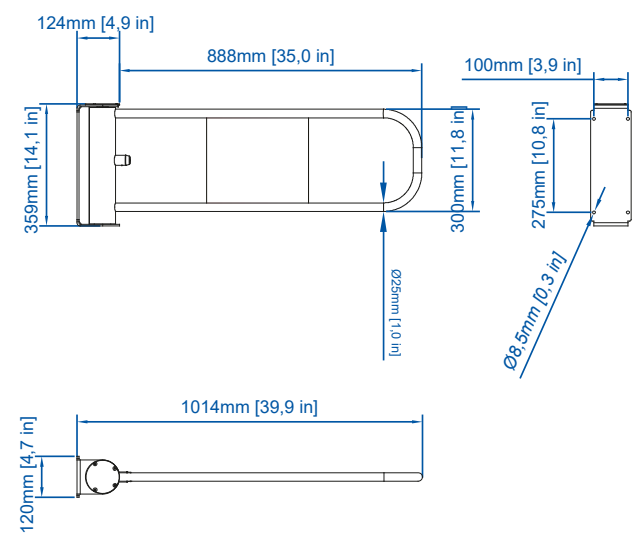


BR1-USC-BD

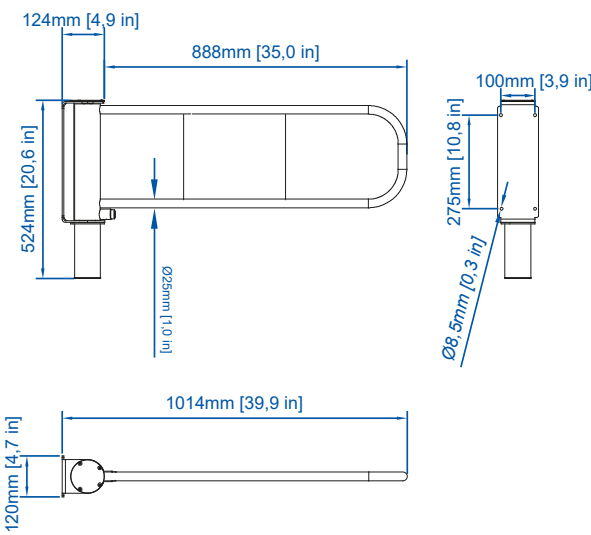


DIMENSIONS BR1-U


BR1-U-RT/LF

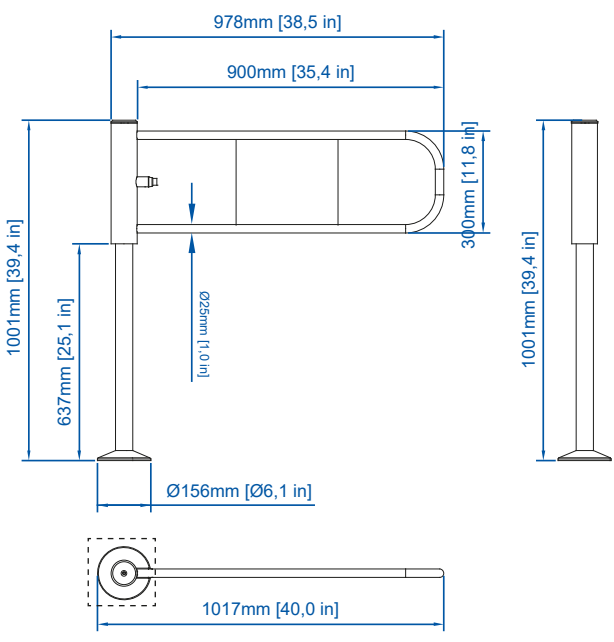


BR1-U-BD

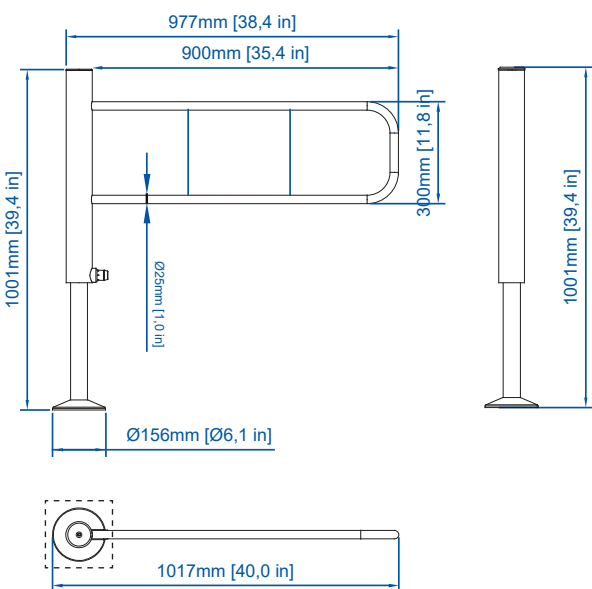

DIMENSIONS EP/EW

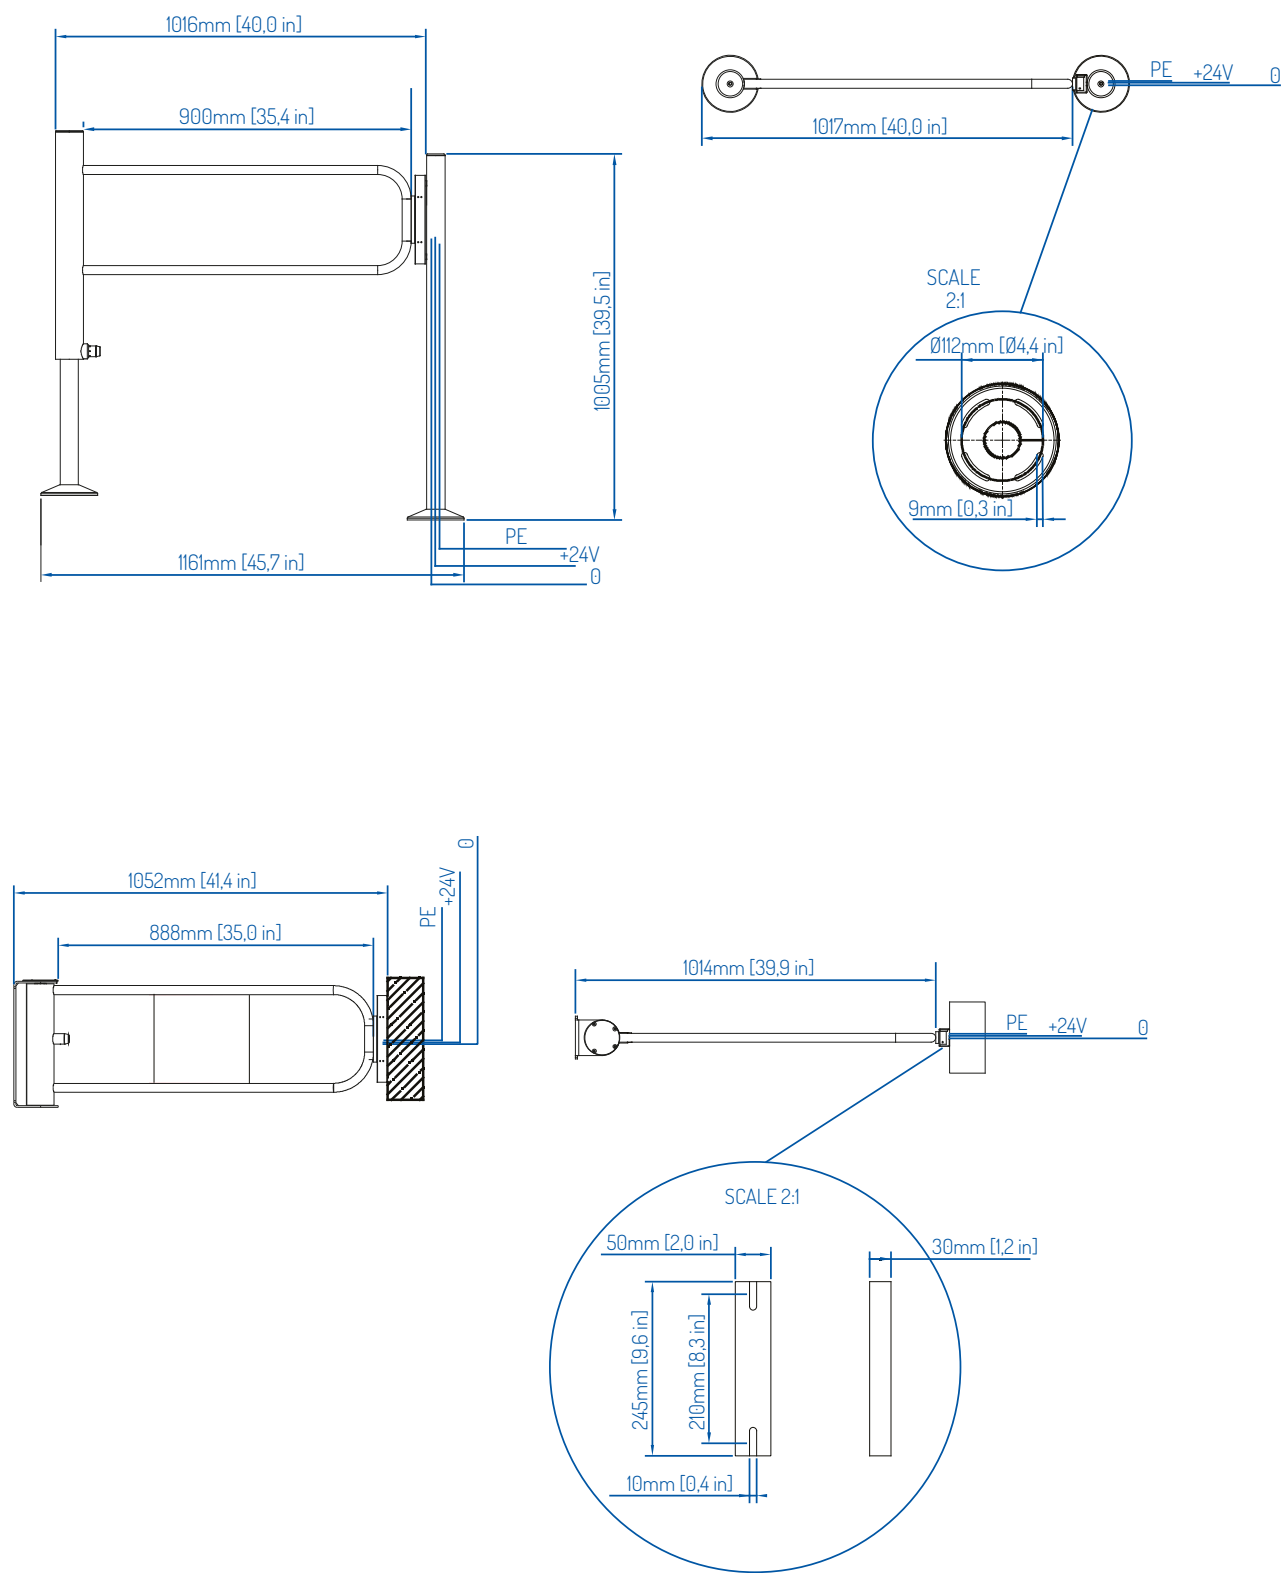

DIMENSIONS BR1-0

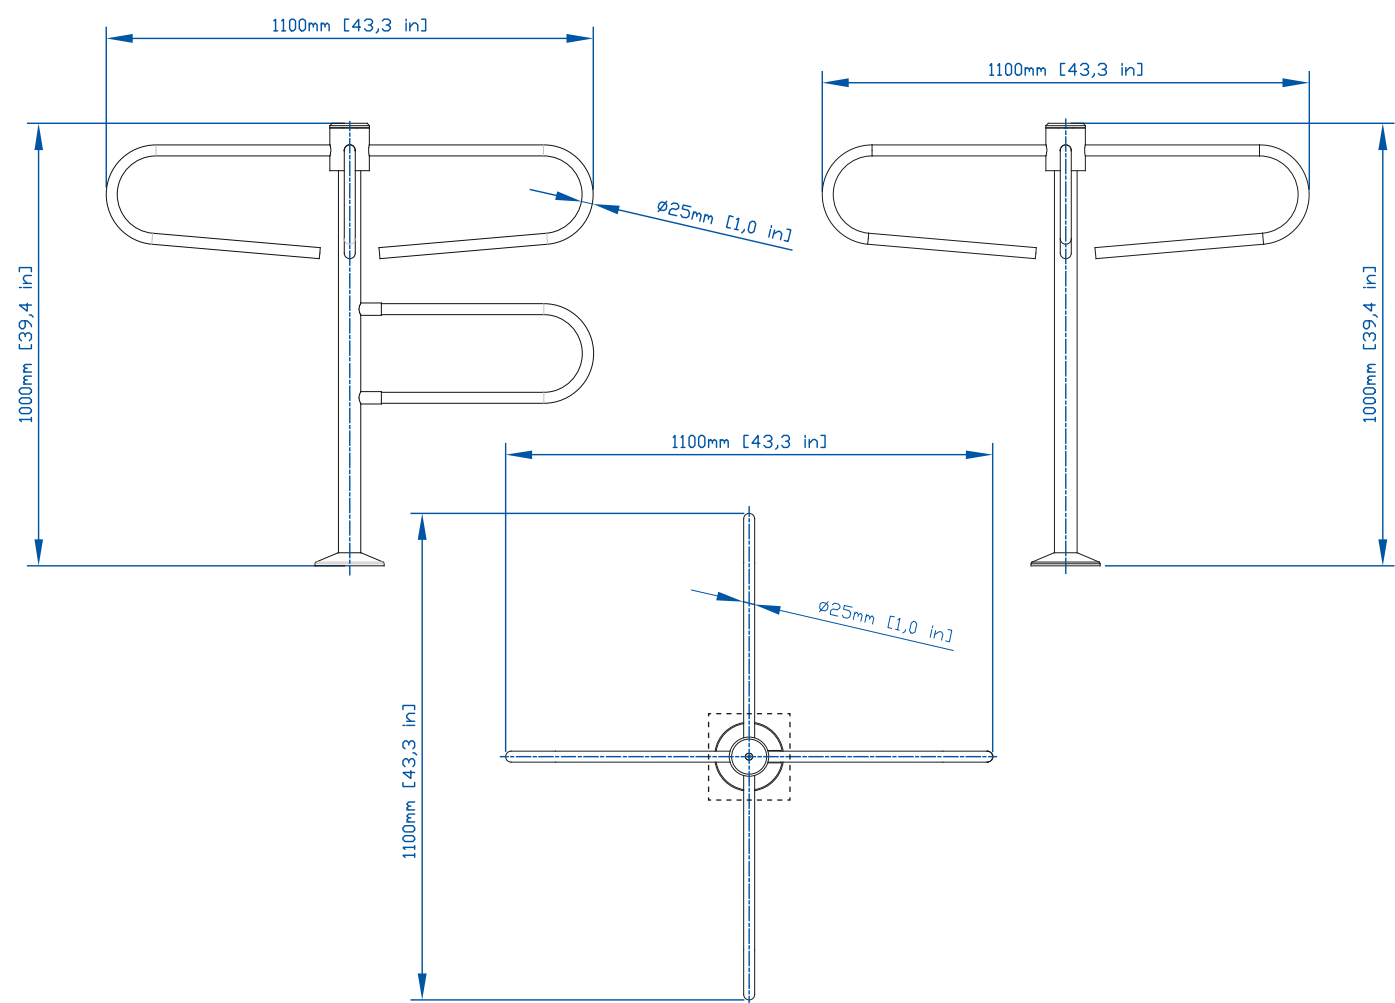

LEGENDA:
Fundament



EU: GASTOPGROUP.COM
USA: GASTOP.US



Distributore unico per l'Italia

infordata
SISTEMI

NUMERO VERDE
800 93 66 55

tornellicontrolloaccessi.it